

DUAL ALERT SMART ALARM

STAR
Safety Technologies by Grote

12/24V

DUAL
VOLTAGE

SAE
INTERNATIONAL

MEETS OR
EXCEEDS



DURABLE
CONSTRUCTION




AUTOMATIC
VOLUME

VOLTAGE: 12–24 VDC

AMP DRAW: 0.3A @ 14VDC

MATERIAL: GLASS FILLED NYLON

OPERATING TEMPERATURE:
-40°F (-40°C) TO 185°F (85°C)

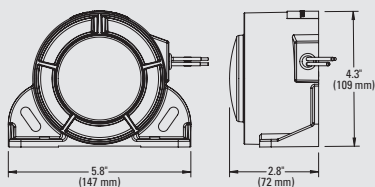

STANDARD TONE

The standard tone is to be used to signal that a vehicle is backing up.




WARBLE TONE

The warble tone is used to alert others when equipment like trash compactors or liftgates are in motion.

TWO DISTINCT TONES FOR TWO UNIQUE HAZARDS... ALL IN ONE POWERFUL ALARM!

Grote's new Dual Alert Smart Alarm is designed to prioritize safety with versatile, adaptive features. The "smart" back-up alarm automatically adjusts the volume of its standard tone from 87 to 112 dB based on surrounding noise levels, ensuring it's heard in any environment. The secondary alert is a distinct warble tone, to signal other potential safety hazards. Use the standard tone for backing up, and warble tone to alert others when equipment like trash compactors or liftgates are in motion, drawing attention to the operation and enhancing workplace safety.

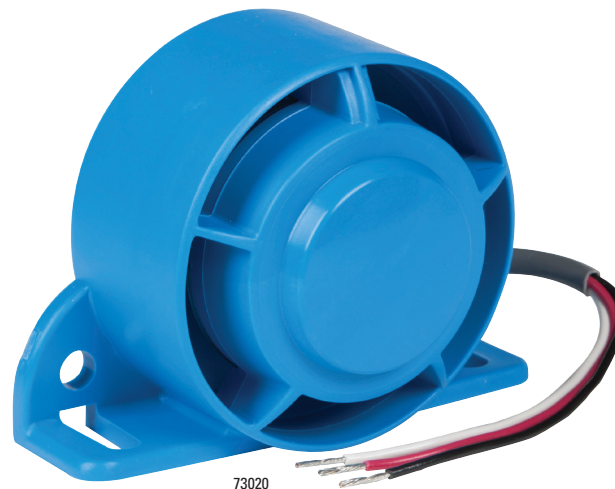

FEATURES & BENEFITS

- **Smart, Auto-Adjustable Standard Tone:** The primary alarm tone automatically adjusts volume from 87 to 112 dB based on environmental noise levels, ensuring it's clearly heard as a back-up alarm in any setting
- **Distinct Warble Tone Alert:** A unique secondary warble tone provides an additional, attention-grabbing sound, ideal for signaling other safety hazards like moving liftgates or equipment in motion
- **Durable, Rugged Construction:** Built to last, with glass-filled nylon housings for added strength and resilience in demanding environments
- **Versatile Installation:** Designed with universal mounting options and a straightforward 3-wire installation, making it adaptable to various equipment types
- **Rear-Facing Speaker Protection:** Engineered with a rear-facing design to shield the speaker from elements like dust and moisture, enhancing durability and ensuring reliable performance over time

PART	DESCRIPTION	DECIBELS	APPROVALS
73020	DUAL ALERT SMART ALARM, MULTI FREQUENCY, STANDARD MOUNT	87 dB TO 112 dB	SAE J994 TYPE F

Warning: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



**FOR MORE INFORMATION
VISIT OUR WEBSITE.
STARSAFETYTECHNOLOGIES.COM**

Star Safety Technologies, LLC
455 Rochester St., Avon, NY 14414
Phone: 585-226-9500 | Fax: 888-478-2797

STAR
Safety Technologies by Grote